

# Ruby GEM™ Trap

## GEM Steam Trap Technical Datasheet



EUK | Rev 7 | Mar 2017

### The GEM Trap

The GEM Trap is a low maintenance steam trap with no moving parts; it will not wear and its performance is guaranteed\* on saturated steam for 10 years. The unique orifice and multistaged throat technology utilises the expansion of the flash steam created by the pressure differential across the trap to control the flow of condensate.

Operating over variable loads, the GEM Trap will suit all industrial applications. The single piece bodies are manufactured from wear and corrosion resistant grades of stainless steel.

The GEM Trap is the most energy efficient steam trap on the market and is supplied with a full sizing and commissioning service.

### THE RUBY GEM TRAP

The Ruby GEM Trap is suitable for high pressure process applications and is designed to be installed between two flanges.

- ▶ Suitable for all standard PN / ASME flanged applications
- ▶ Operates at high pressures
- ▶ Installed between two flanges any face-to-face length can be accommodated with a spool piece

#### Suitable Applications

- ▶ High pressure applications
- ▶ Low condensate duty applications

#### Operating Parameters

- ▶ TMA 500°C (930°F)
- ▶ PMA 100 barg (1450 psig)

Maximum temperatures and pressures are subject to the gaskets used in the fittings.

Higher pressure ratings available in our RTJ Ruby Trap design.

#### Ancillary Parts

- ▶ Insulation Jacket
- ▶ Optional 'Y' Strainer

#### Available Spares

- ▶ No spares required

#### Sizes and Connection Types Available

	PN Flanged	ASME Flanged	RTJ
DN15 / ½"	✓	✓	On request
DN20 / ¾"	✓	✓	On request
DN25 / 1"	✓	✓	On request
DN40 / 1½"	✓	✓	On request
DN50 / 2"	✓	✓	On request
DN80 / 3"	✓	✓	On request
DN100 / 4"	✓	✓	On request
DN150 / 6"	On request	On request	On request



### Key GEM Trap Benefits

#### Quality, Efficiency, Reliability and Service

##### Permanent Energy Savings

- ▶ Typical payback < 2 years
- ▶ Inherently more efficient than mechanical steam traps

##### 10 Year Performance Guarantee\*

- ▶ No moving parts to wear or fail
- ▶ No inserts – no leak path

##### Reduced Maintenance

- ▶ No on-going trap surveys
- ▶ Minimal annual maintenance

##### Improved Process Control

- ▶ No pressurisation of condensate return system
- ▶ Elimination of steam trap related waterhammer

##### Performs Across Industrial Variable Loads

- ▶ Each trap supplied with full sizing and commissioning service


\* Reduced guarantee offered for superheated steam

# Ruby GEM™ Trap


GEM Steam Trap Technical Datasheet



## Product Diagram

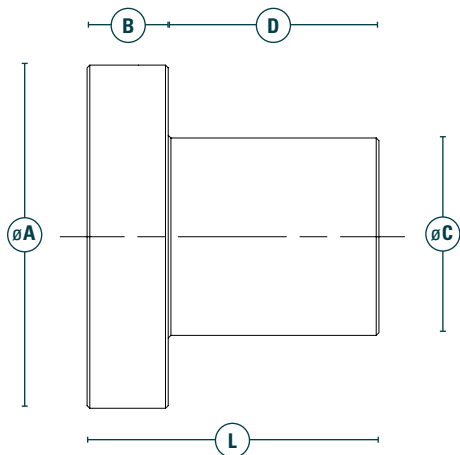

## Installation Layout

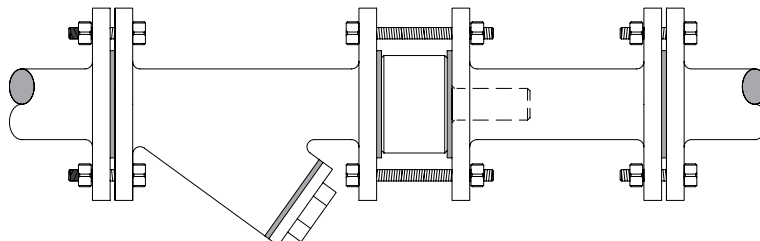

## Dimensions and Weights

	ø A	B (Face to Face)	ø C	D	L (Length)	Weight
R15 (DN15 / ½")	40mm	20mm	13mm	31mm	51mm	0.2kg
R20 (DN20 / ¾")	50mm	20mm	16mm	43mm	63mm	0.3kg
R25 (DN25 / 1")	60mm	20mm	21mm	58mm	78mm	0.5kg
R40 (DN40 / 1½")	75mm	30mm	36mm	85mm	115mm	1.5kg
R50 (DN50 / 2")	90mm	30mm	47mm	84mm	114mm	2.2kg
R80 (DN80 / 3")	127mm	30mm	73mm	78mm	108mm	4.5kg
R100 (DN100 / 4")	158mm	40mm	97mm	100mm	140mm	9.5kg
R150 (DN150 / 6")	200mm	50mm	125mm	200mm	250mm	25kg approx

## Materials

Part	Material
Body	BS EN 10088-3 1.4305 / ASTM A582 303

## Suitable Pipe Schedules

- ▶ Maximum pipe thickness Schedule 80
- ▶ Please contact the manufacturer for assistance with thicker schedules

- ▶ Full product traceability is part of our Quality Assurance procedure
- ▶ Type 3.1 material certification to BS EN 10204:2004
- ▶ Thermal Energy reserve the right to amend material specification
- ▶ Other materials available on request

*All certification/inspection requirements must be stated at time of order placement.*

## FOR FURTHER INFORMATION

For further information on the full GEM Trap range contact us at [enq@thermalenergy.com](mailto:enq@thermalenergy.com) or visit [www.thermalenergy.com](http://www.thermalenergy.com)



An Innovative Technology Company Providing Custom Energy and Emission Reduction Solutions

[enq@thermalenergy.com](mailto:enq@thermalenergy.com) / [www.thermalenergy.com](http://www.thermalenergy.com)