

Flanged Opal GEM™ Trap (DN25)

Technical Datasheet



The GEM Trap is a low maintenance steam trap with no moving parts; it will not wear and is performance guaranteed* on saturated steam for 10 years. The unique orifice and multistaged throat technology utilises the expansion of the flash steam created by the pressure differential across the trap to control the flow of condensate.

Operating over variable loads, the GEM Trap will suit all industrial applications. The single piece bodies are manufactured from wear and corrosion resistant grades of stainless steel.

The GEM Trap is the most energy efficient steam trap on the market and is supplied with a full sizing and commissioning service.


THE FLANGED OPAL GEM TRAP

Flanged Opal Traps contain GEM's inverted cone technology and a robust reinforced mesh strainer basket with large surface area to further protect the orifice from debris.

- ▶ Suitable for all standard PN / ASME flanged applications
- ▶ Fully maintainable in-line
- ▶ Easy access to both strainer basket and orifice chamber

Suitable Applications

- ▶ Low condensate duty applications
- ▶ Line drainage / trace heating

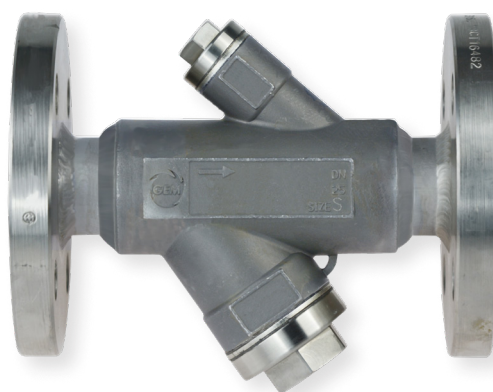

Rating	PMA	TMA
DN25 / 1"	PN100 / Class 600	425°C (800°F)

PMA 100 barg (1450 psig) available on request – refer to markings on individual trap
For all ratings over 50 barg (730 psig), a charge will be applicable to pressure test.
Flanged Opal rating is limited by the specification of the flange selected.

Other flange specifications can be accommodated on request.
Threaded (BSP/NPT) and Socket Weldable options also available.

Ancillary Parts

- ▶ Insulation Jacket
- ▶ Optional drainage valve

Available Spares

- ▶ Quality Kammprofile graphite-faced gasket with SS core
- ▶ Robust SS reinforced strainer basket

GEM TRAP BENEFITS

Quality, Efficiency, Reliability and Service

Permanent Energy Savings

- ▶ Typical payback < 2 years
- ▶ Inherently more efficient than mechanical steam traps

10 Year Performance Guarantee*

- ▶ No moving parts to wear or fail
- ▶ No inserts – no leak path

Reduced Maintenance

- ▶ No on-going trap surveys
- ▶ Minimal annual maintenance

Improved Process Control

- ▶ No pressurisation of condensate return system
- ▶ Elimination of steam trap related waterhammer

Performs Across Industrial Variable Loads

- ▶ Each trap supplied with full sizing and commissioning service


* Reduced guarantee offered for superheated steam

Flanged Opal GEM™ Trap (DN25)

Technical Datasheet



Product Diagram

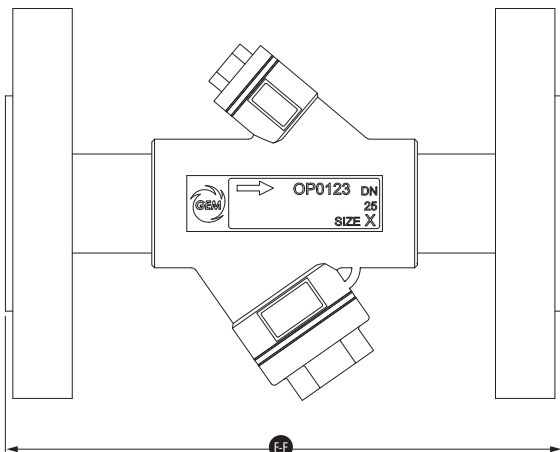

Materials

Part	Material
Trap Body	Cast Stainless Steel ASTM A351 CF8M
Pipe	ASTM A376 TP316L / EN10216-5 1.4404
Flange	ASTM A182 F316L / EN10222-5 1.4404
Magnetic Filter Cap*	Stainless Steel ASTM A479 316 / EN 10088-3 1.4401 plus TEI High Temperature Magnet
Orifice Gasket	Kammprofile 316 Stainless Steel Core / Graphite-faced
Strainer Cap	Stainless Steel ASTM A479 316 / EN 10088-3 1.4401
Strainer Gasket	Kammprofile 316 Stainless Steel Core / Graphite-faced
Strainer Basket	Reinforced 316 Stainless Steel 60 Mesh

* See GEM™ Trap Secondary Magnetic Filter Datasheet

- ▶ All welding carried out to recognised industry standards such as ASME B31.3 or BS 4515, by certified welders
- ▶ Appropriate testing options depend on pipe materials and weld types
- ▶ Testing options include hydrostatic pressure testing, radiography, ultrasonic or phased array testing, Liquid Penetrant Inspection, and Magnetic Particle Inspection
- ▶ Any testing carried out at additional cost
- ▶ Full product traceability is part of our Quality Assurance procedure
- ▶ Type 3.1 material certification to EN 10204:2004
- ▶ Thermal Energy reserve the right to amend material specification

All certification/inspection requirements must be stated at time of order placement.

Dimensions

	OP25 (DN25 / 1")
Face to Face (F-F) ANSI150	160mm
Face to Face (F-F) ANSI300/600	230mm
Face to Face (F-F) PN16/25/40	160mm
Face to Face (F-F) PN100	230mm


Face to Face dimensions above illustrate minimum face to face available/possible in line with ISO 6554:1980 (EN 26554:1991).

Longer Face to Face lengths available to suit requirements.


Trap body weight is 0.75kg – total weight depends on flange specification supplied.

Discharge Capacity

Standard

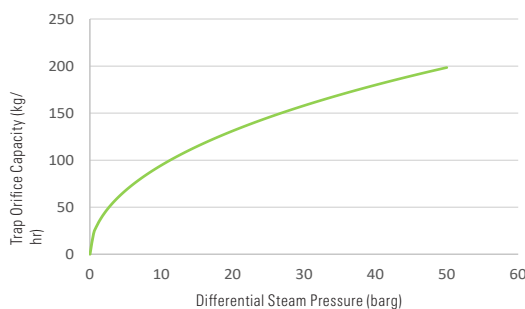

Extended Capacity

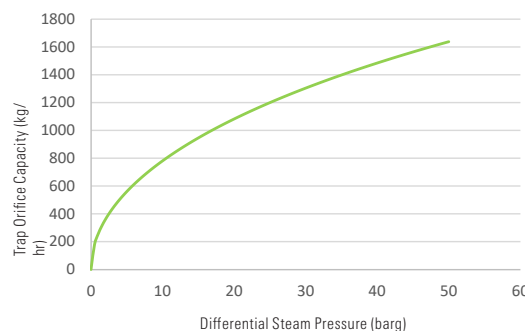

Maximum discharge capacity for Opal Trap at saturation temperature.*

The GEM Trap will have 2-3 times the capacity at start-up.

* Actual capacity is dependent on internal sizing configuration.

For further information on the full GEM™ Trap range contact us at technical@thermalenergy.com or visit www.thermalenergy.com