

# Opal GEM™ Trap (DN15 & DN20)

## Technical Datasheet



The GEM Trap is a low maintenance steam trap with no moving parts; it will not wear and is performance guaranteed\* on saturated steam for 10 years. The unique orifice and multistaged throat technology utilises the expansion of the flash steam created by the pressure differential across the trap to control the flow of condensate.

Operating over variable loads, the GEM Trap will suit all industrial applications. The single piece bodies are manufactured from wear and corrosion resistant grades of stainless steel.

The GEM Trap is the most energy efficient steam trap on the market and is supplied with a full sizing and commissioning service.

### THE OPAL GEM TRAP

Opal Traps contain GEM's inverted cone technology and a robust reinforced mesh strainer basket with large surface area to further protect the orifice from debris.

- ▶ Same face to face dimension as mechanical traps
- ▶ Quick and easy to install
- ▶ Fully maintainable in-line
- ▶ Easy access to both strainer basket and orifice chamber

#### Suitable Applications

- ▶ Low condensate duty applications
- ▶ Line drainage / trace heating

| Rating    | PMA                | TMA           |
|-----------|--------------------|---------------|
| DN15 / ½" | 50 barg (730 psig) | 400°C (750°F) |
| DN20 / ¾" | 50 barg (730 psig) | 400°C (750°F) |

- ▶ PMA 100 barg (1450 psig) available on request – refer to markings on individual trap

For all ratings over 50 barg, a charge will be applicable to pressure test.

#### Ancillary Parts

- ▶ Insulation Jacket
- ▶ Optional drainage valve

#### Available Spares

- ▶ Quality Kamprofile graphite-faced gasket with SS core
- ▶ Robust SS reinforced strainer basket

#### Sizes & Connection Types Available

|           | Flanged    | Threaded<br>BSP / NPT | Socket<br>Weldable |
|-----------|------------|-----------------------|--------------------|
| DN15 / ½" | On request | ✓                     | ✓                  |
| DN20 / ¾" | On request | ✓                     | ✓                  |



### GEM TRAP BENEFITS

#### Quality, Efficiency, Reliability and Service

##### Permanent Energy Savings

- ▶ Typical payback < 2 years
- ▶ Inherently more efficient than mechanical steam traps

##### 10 Year Performance Guarantee\*

- ▶ No moving parts to wear or fail
- ▶ No inserts – no leak path

##### Reduced Maintenance

- ▶ No on-going trap surveys
- ▶ Minimal annual maintenance

##### Improved Process Control

- ▶ No pressurisation of condensate return system
- ▶ Elimination of steam trap related waterhammer

##### Performs Across Industrial Variable Loads

- ▶ Each trap supplied with full sizing and commissioning service


\* Reduced guarantee offered for superheated steam

# Opal GEM™ Trap (DN15 & DN20)

## Technical Datasheet



### Product Diagram

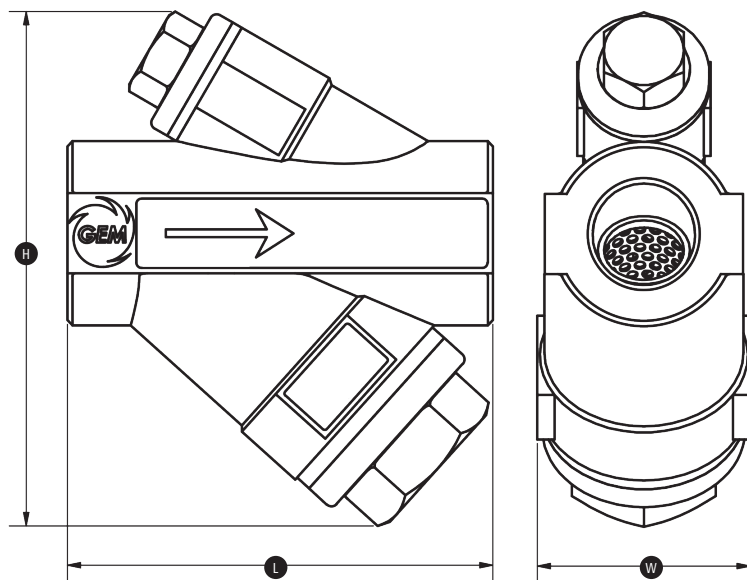

### Dimensions & Weights

|            | OP15 (DN15 / ½") | OP20 (DN20 / ¾") |
|------------|------------------|------------------|
| Height (H) | 97mm             | 97mm             |
| Length (L) | 80mm             | 80mm             |
| Width (W)  | 40mm             | 40mm             |
| Weight     | 0.75kg           | 0.75kg           |

### Materials

| Part                 | Material                                                                           |
|----------------------|------------------------------------------------------------------------------------|
| Trap Body            | Cast Stainless Steel ASTM A351 CF8M                                                |
| Strainer Cap         | Cast Stainless Steel ASTM A351 CF8M                                                |
| Strainer Basket      | Reinforced 316 Stainless Steel 60 Mesh                                             |
| Gaskets              | Kammprofile 316 Stainless Steel Core / Graphite-faced                              |
| Magnetic Filter Cap* | Stainless Steel ASTM A479 304 / EN 10088-3 1.4301 plus TEI High Temperature Magnet |


\* See GEM™ Trap Secondary Magnetic Filter Datasheet

- ▶ Full product traceability is part of our Quality Assurance procedure
- ▶ Type 3.1 material certification to EN 10204:2004
- ▶ Thermal Energy reserve the right to amend material specification

All certification/inspection requirements must be stated at time of order placement.

For further information on the full GEM™ Trap range contact us at [technical@thermalenergy.com](mailto:technical@thermalenergy.com) or visit [www.thermalenergy.com](http://www.thermalenergy.com)

### Discharge Capacity

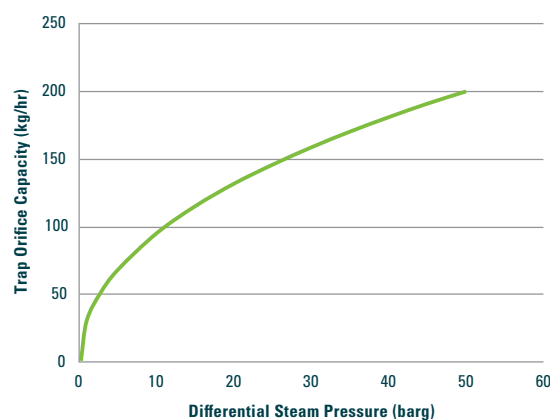

Maximum discharge capacity for Opal Trap at saturation temperature.\*

The GEM Trap will have 2-3 times the capacity at start-up.

\* Actual capacity is dependent on internal sizing configuration.